

### PRODUCT OVERVIEW

The **Pressure MultiVIEW (PMV)** combines features of the Pressure Monitor (PM) and MultiVIEW (MV) into the same touch monitor allowing the user to easily toggle between Pressure Monitor and MultiVIEW screens as needed.

The Pressure MultiVIEW (PMV) has a dedicated screen that can be configured to show set point, alarm status and / or allow the user to adjust set point of up to 28 points. The user can swipe left or right to view more information. Set point adjustments can be password protected.

The Pressure MultiVIEW (PMV) also has a screen dedicated to displaying a clear indication of the room's pressure status and current usage. Users can easily toggle between Pressure Monitor and MultiVIEW screens.

The Pressure MultiVIEW (PMV) can be ordered as a touch monitor only solution (**IRM - PMV**), or as a room level controller (**IRC - PMV**) that can support simple to complex room controls including volumetric offset, variable volume, and direct pressure controls for small to large critical environments using up to three supply air valves and up to three general exhaust valves.

Each **PMV** comes with an I/O Board and one 7" Touch Monitor (w/ accessories), with the option to add up to three more touch monitors.

### Applications:

- High Speed Fume Hood Labs
- Volumetric Tracking Pairs
- Wet Laboratories
- Vivarium / Animal Rooms
- Surgery Suites / Operating Rooms
- Pharmacy (USP-797 & 800)
- Airborne Infectious Isolation Rooms
- Procedure Rooms
- Patient Rooms
- Clean Rooms
- Cascaded Labs

### Product Features:

- Clear / unambiguous display of room pressure status on up to 4 different touch monitors.
- Monitor and control up to three pressure relationships.
- Display, adjust set point, and alarm up to 28 points - swipe left to view more data.
- Volumetric offset and direct pressure control for critical spaces with rapid speed of response requirements.
- High speed, closed loop valve control.
- Place touch monitors up to 200' from I/O Board.
- No laptop or special programming tool required.
- Archive, store, and load controller programming and commissioning data.
- Clone, load, and archive monitor settings.
- Multiple level password protection.
- Fast, easy setup, balancing and commissioning via dedicated Touch Monitor commissioning menus.
- BACnet BTL—Open communication protocol.
- I/O diagnostic tools.
- Visual and audible alarms.



### EQUIPMENT

#### Included:

- 1 - I/O 14:10 Board
- 1 - 7" Touch Monitor (programmed as a Pressure MultiVIEW)
- 1 - 7" Monitor mounting bracket
- 1 - 25' Cat 6 cable

#### Optional:

- Up to 3 additional touch monitors (w/ mounting bracket and cat6 cable)
- Up to 3 pressure transducers (with 2 pressure pickup plates each)

### SPECIFICATIONS (I/O 14:10 Board)

**Dimensions - Controller:** 10.25"W x 4"H x 1.25"D

**Input Power:** 24 VAC +/- 10%, 50/60 Hz, maximum 50 VA, Class 2

**Onboard Power:** 5 - 24 VDC (200mA total max.), 3 - 5 VDC (100mA total max.)

**Operating Temperature:** 32° to 122°F (0° to 50°C)

**Storage Temperature:** -40° to 70°C (-40° to 158°)

**Humidity** 5 to 95% RH (non-condensing)

**Analog Inputs:** 14 (0-10v, 2-10v, 1-5v)

**Analog Outputs:** 10 (0-10v, 2-10v, 1-5v)

**Digital Inputs:** 4


**Relays (Digital Outputs):** 4 Normally closed (2A @ 30VDC)

**Communication:** BACnet® MS/TP (BTL – listed / tested)

**Connectors:** Removable screw type (14 - 26ga wire)

**Listing:** UL 916, C-UL, BTL

**Manufactured Under:** ISO 13485:2003 Medical  
FDA REGISTERED MANUFACTURER

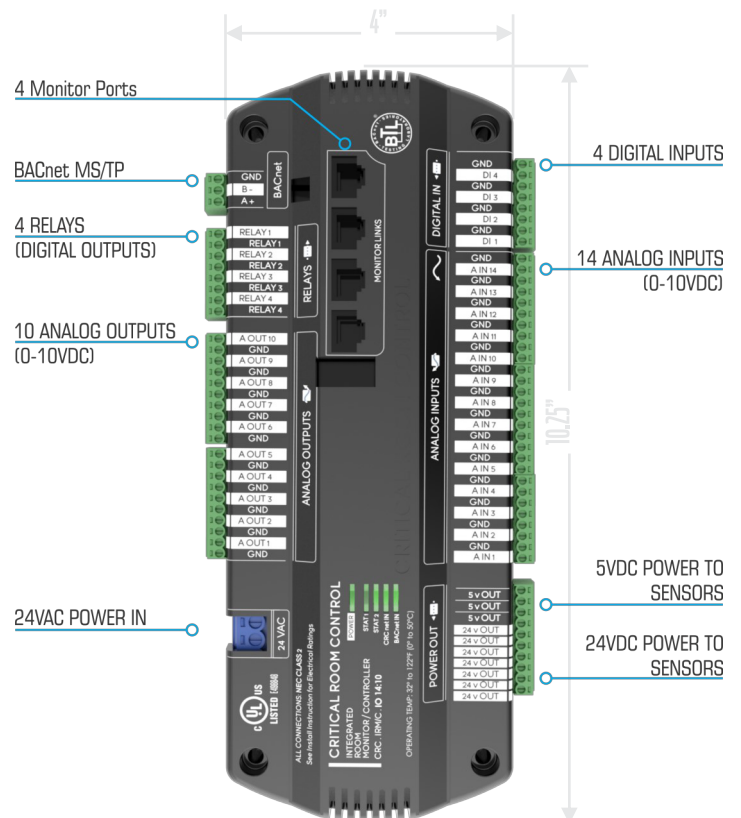

#### SPECIFICATIONS (7" TOUCH MONITOR)

**Dimensions:** 9 x 5.375 x 1.5 in.

**Display Type:** Resistive touch 7in. (109 mm) TFT/IPS

**Resolution:** WVGA RGB 480px x 800px


**Brightness:** Sunlight readable (600 cd/m2)

**Input Power:** Supplied by IRM/C I/O via CAT6 cable, (200' max per monitor or 500' max combined cabling distance if using multiple monitors)

**Environmental (operating):** 50°F to 95°F (10°C to 35°C), 0% to 95%

**Mounting:** Mounting bracket (included) to a 3-gang electrical box (not included)

**Connection to I/O Board:** Up to 200' Shielded Cat 6 cable 22ga (25' Cat 6 included)

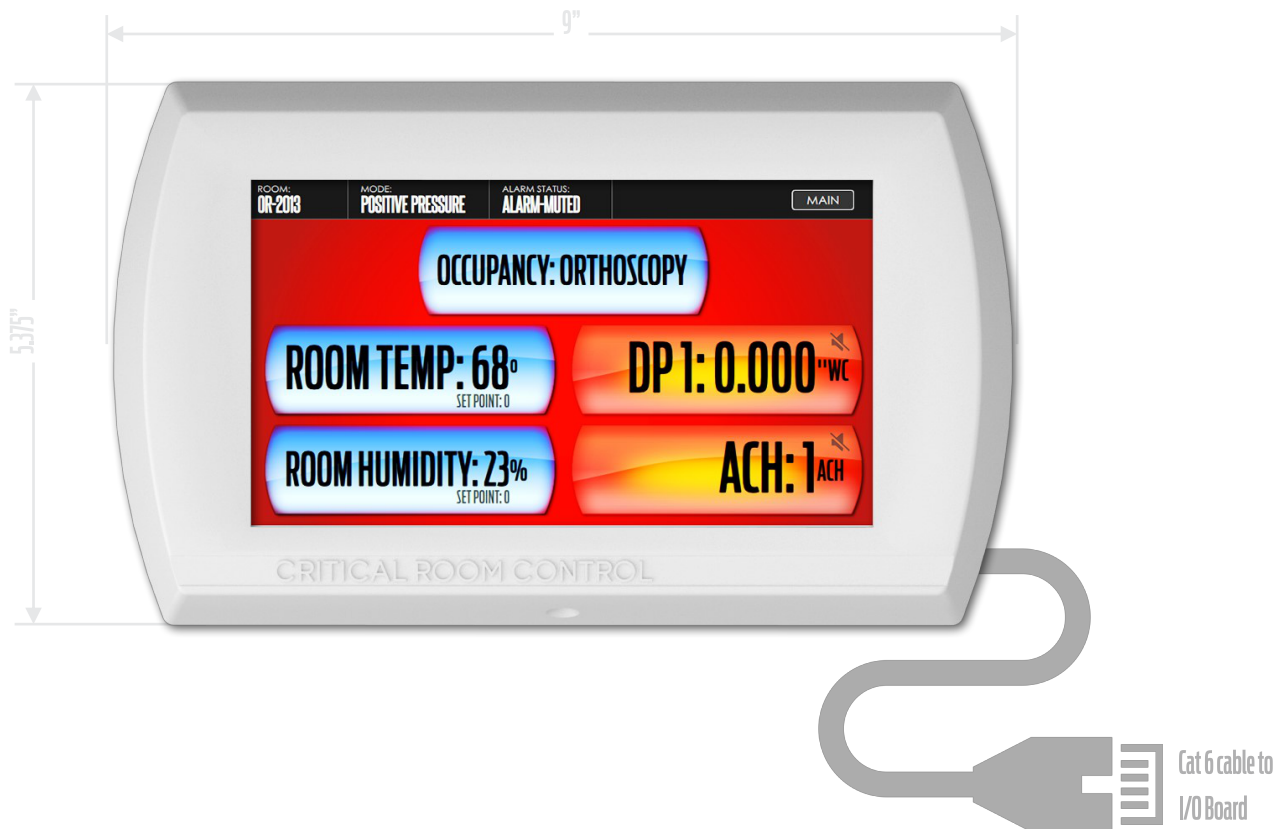

#### OPTIONS

#### EQUIPMENT

#### ROOM CONTROL (SELECT ONE):

**IRM**  
ROOM MONITOR ONLY

**IRC**  
ROOM CONTROL

#### PRIMARY PRODUCT:



**PMV**  
PRESSURE  
MultiVIEW

(1) I/O Board  
(1) 7" Touch Monitor  
(1) Monitor mounting plate  
(1) 25' Cat 6 Cable

#### PRESSURE RELATIONSHIPS (SELECT ONE):

0

1

2

3

**Per pressure relationship:**  
(1) Pressure transducer  
(2) Pressure pickup plates

#### CONTROL OPTIONS (SELECT ONE):

**N**  
NONE

**D**  
DIRECT PRESSURE

**V**  
VOLUMETRIC OFFSET

#### ADDITIONAL TOUCH MONITORS (SELECT UP TO THREE):



**PM**  
PRESSURE  
MONITOR



**PMV**  
PRESSURE  
MultiVIEW



**MV**  
MultiVIEW

**Per touch monitor:**  
(1) 7" Touch Monitor  
(1) Monitor mounting plate  
(1) 25' Cat 6 Cable

#### NOMENCLATURE:

